


2,5 L ROUND TIN CAN, WITH A PRESSURE LID - WITH 32mm / 42mm PLASTIC SPOUT

0,5L / 3L

KEY FEATURES

RECYCLABLE STEEL,
FOOD CONTACT SAFE

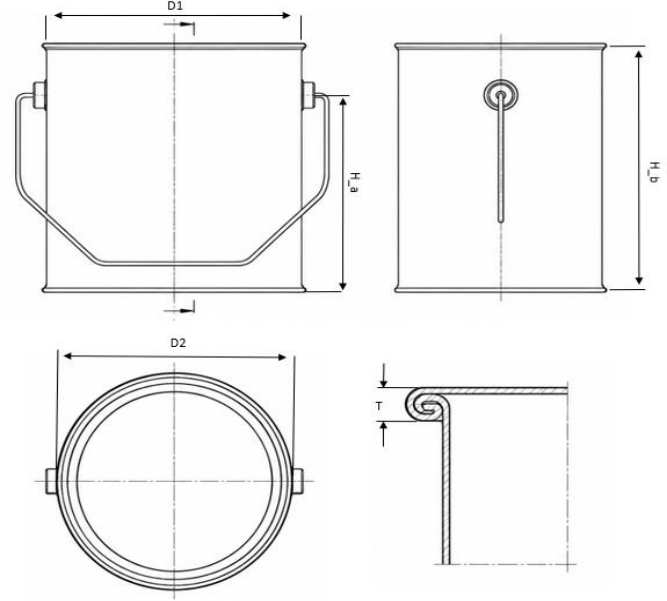

TECHNICAL SPECIFICATIONS

ITEM	VALUE	TOLERANCE
Nominal Volume , L (min/max)	0,5 / 3	-
Diameter (D),mm	153	±1 mm
Height (H),mm (min/max)	50 / 300	±2 mm
Body Thickness, mm	0,25	±%5
Bottom Thickness, mm	0,25	±%5
Lid Thickness, mm	0,25	±%5
Food Contact	✓	
Printing options	Body	Offset Printing ✓
		Lacquered ✓
	Lid	Plain ✓
		Offset Printing ✓
		Lacquered ✓
		Plain ✓

MATERIAL SPECIFICATIONS

Metal Type	Tinplate Sheet
Standard	EN 10202 Electrolytic Tinplate
Tin Coating Amount (Both Sides)	2.8 g/m ² / 2.8 g/m ²

LID / COMPONENT

Lid Type	3T ring and pressure lid 32mm/42mm Plastic Spout
Sealing Gasket	Water based compound basde on synthetic rubber.
Handle	Without handle Wire handle Plastic Handle

PACKAGING & LOGISTICS

TRUCK		40'CONTAINER	
QTY/PALLET	QTY/TRUCK	QTY/PALLET	QTY/CONT.
539	12.936	539	10.241



SCAN FOR MORE
INFORMATION

www.ugurteneke.com.tr



RECYCLABLE
STEEL



FOOD CONTACT
SAFE*



MADE IN
TÜRKİYE



DOSB 2. Kısım D-2006 Sok. No.4
Dilovası 41455 Kocaeli / TÜRKİYE



+90 262 754 0110 pbx



info@ugurteneke.com.tr