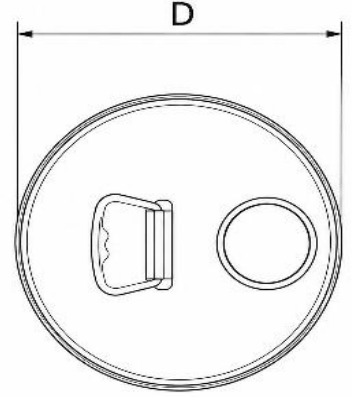
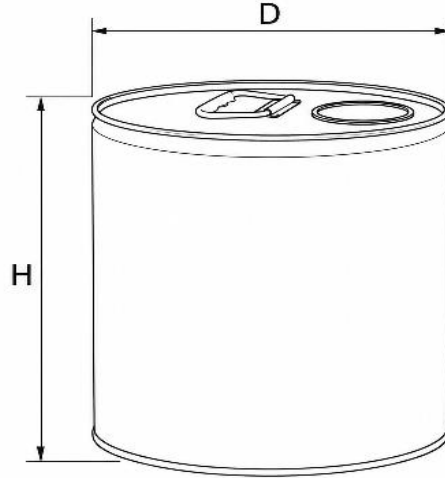


6L ROUND STEEL CAN WITH PLASTIC SPOUT
6L
KEY FEATURES

ADR APPROVED, CONICAL DESIGN, STACKABLE,
 SUITABLE FOR TRANSPORTATION OF LIQUID HAZARDOUS MATERIALS,
 RECYCLABLE STEEL,
 FOOD CONTACT SAFE


TECHNICAL SPECIFICATIONS

ITEM	VALUE	TOLERANCE
Nominal Volume	6L	-
Diameter (D), mm (Bottom / Top)	216 / 210	±1 mm
Height (H), mm (min / max)	212 / 235	±2 mm
Body Thickness, mm	0,25 / 0,28	±%5
Bottom Thickness, mm	0,25 / 0,28	±%5
Lid Thickness, mm	0,25 / 0,28	±%5
Diameter of hole, mm	42,25	±0,05
UN Certification	✓	
U n /1A1/Y1,2/100/year of manufacture/I/CSI95720UGUR08		
U n /1A1/Y1,2/100/year of manufacture/I/CSI116721UGUR16		
Food Contact		✓
Printing options	Body	Offset Printing ✓ Lacquered ✓ Plain ✓
	Lid	Offset Printing ✓ Lacquered ✓ Plain ✓

MATERIAL SPECIFICATIONS

Metal Type	Tinplate Sheet
Standard	EN 10202 Electrolytic Tinplate
Tin Coating Amount (Both Sides)	2.8 g/m ² / 2.8 g/m ²

LID / COMPONENT

Lid Type	Plastic Spout
Sealing gasket	Water based compound basde on synthetic rubber.
Handle	Wire handle

PACKAGING & LOGISTICS

TRUCK		40'CONTAINER	
QTY/PALLET	QTY/TRUCK	QTY/PALLET	QTY/CONT.
125	6.500	125	5.250


 SCAN FOR MORE
 INFORMATION

www.ugurteneke.com.tr

 UN
 APPROVED

 RECYCLABLE
 STEEL

 FOOD CONTACT
 SAFE*

 MADE IN
 TÜRKİYE

 DOSB 2.Kısım D-2006 Sok. No.4
 Dilovası 41455 Kocaeli / TÜRKİYE


+90 262 754 0110 pbx


info@ugurteneke.com.tr